

# 100G SR4 QSFP28 to QSFP28 Active Optical Cables

## P/N: WS-QS28-AOCxCxxx



### Applications:

- Ethernet for 100GBASE-SR4
- InfiniBand EDR, FDR, & QDR
- Proprietary Interconnections

### Features:

- Hot Pluggable QSFP28 Cable End
- Supports 25.78125Gb/s per channel
- Low Power Dissipation, Max 1.8W Each End
- Operating Case Temperature: 0 °C ~70 °C
- SFF-8636 Management Interface
- SFF-8661: Pluggable Module
- SFF-8679: General Electrical
- GR-468: Reliability Qualification
- IEEE 802.3bm: Physical Layer Specifications and Management Parameters
- ROHS-6: Environment Safety

### General Product Characteristics

Parameter	Value	Unit	Comments
Module Form Factor	QSFP28	As defined by SFF-8661	Module Form Factor
Number of Lanes	4 TX and 4 RX		
Maximum Aggregate Data Rate	103.125	Gb/s	
Maximum Data Rate per Lane	25.78125	Gb/s	
Standard Cable Lengths	3, 5, 7, 10, 15	meters	Other lengths may be available upon request
Protocols Supported	InfiniBand, Ethernet		
Electrical Interface and Pin-out	38-pin edge connector		Pin-out as defined by SFF-8679
Standard Optical Cable Type	Multimode OM3 (<70m) Multimode OM4 (≤100m)		
Maximum Power Consumption	1.8	Watts	Varies with output voltage swing

per End			and pre-emphasis settings
Management Interface	Serial, I2C-based, 400 kHz maximum frequency		As defined by SFF-8636
BER	$<10^{-12}$		PRBS:31, input signal swing 800mV differential

### Absolute Maximum Ratings

Exceeding the limits below may damage the active optical cable permanently.

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Ref.
Maximum Supply Voltage	$V_{cc}$	-0.5		3.6	V	
Storage Temperature	$T_{sto}$	-40		85	°C	
Case Operating Temperature	$T_{st}$	0		70	°C	
Relative Humidity	RH	0		85	%	1

Notes:

1. No-condensing.

### Parameters

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Ref.
Supply Voltage	$V_{cc}$	3.14		3.46	V	
Power Consumption	$P_{Con}$			1.8	W	
Bit Rate	BR		25.78125		Gb/s	1
Bit Error Ratio	BER			$10^{-12}$		2
Center wavelength	$\lambda_c$	840		860	nm	3
Number of Lanes		4				
Management Interface		Serial, I2C-based, maximum frequency 400 kHz				4
Logic Input Voltage High	$V_{ih}$	2		$V_{cc}+0.3$	V	
Logic Input Voltage Low	$V_{il}$	-0.3		0.8	V	


Notes:

1. Single lane
2. PRBS=  $2^{31}-1$  @ 25.78125Gb/s
3. As defined by IEEE Std. 802.3bm -2015
4. As defined by SFF-8636

**Electrical Characteristics**

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Ref.
Transceiver Power Supply Current	$I_{cc}$			600	mA	
Transceiver Power on Initialization Time	$T_{init}$			2000	ms	
<b>Transmitter at TP1a</b>						
Differential Data Input Voltage Peak to Peak Swing	$V_{in,pp}$			900	mV	
Common Mode Noise RMS				17.5	mV	
Differential Input Return Loss	SDD22	Per OIF CEI-28G-VSR and CAUI-4 Requirements			dB	
Common Mode to Differential Conversion and Differential to Common Mode Conversion	SDD22 SCD22				dB	
Common Mode Return Loss	SCC22				dB	
Transition Time, 20% to 80%	$T_r, T_f$	10			ps	
Common Mode Voltage	$V_{cm}$	-0.3		2.8	V	
Eye Width @ 1E-15 Probability	EW15	0.46			UI	
Eye Height @ 1E-15 Probability	EH15	94			mv	
<b>Receiver at TP4</b>						
Differential Data Output Voltage Peak to Peak Swing	$V_{opp}$	300		900	mV	
Differential Output Impedance	$Z_{os}$	90	100	110	Ohms	
Common Mode Voltage	$V_{cm}$	-0.35		2.85	V	
Common Mode Noise RMS				17.5	mV	
Differential Output Return Loss	SDD22	Per OIF CEI-28G-VSR and CAUI-4 Requirements			dB	
Common Mode to Differential Conversion and Differential to Common Mode Conversion	SDD22 SCD22					
Common Mode Return Loss	SCC22			-2	dB	
Transition Time, 20% to 80%	$T_r, T_f$	10			ps	
Eye Width @ 1E-15 Probability	EW15	0.57			UI	
Eye Height @ 1E-15 Probability	EH15	228			mV	

**Pin Descriptions (compliant SFF-8679)**

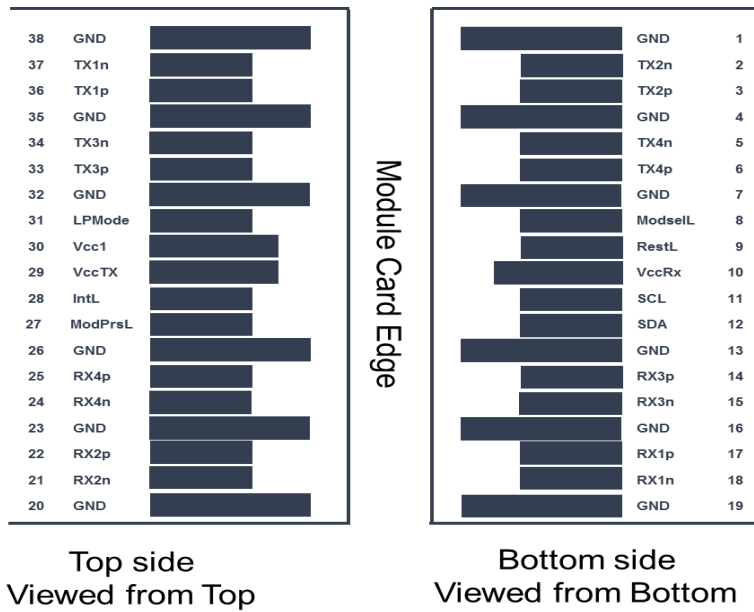


PIN	Symbol	Description	Ref.
1	GND	Ground	
2	TX2n	Transmitter Inverted Data Input	
3	TX2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	1
5	TX4n	Transmitter Inverted Data Input	
6	TX4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	1
8	ModSelL	Module Select	2
9	ResetL	Module Reset	2
10	V <sub>cc</sub> RX	+3.3V Receiver Power Supply Receiver	
11	SCL	2-wire Serial Interface Clock	2
12	SDA	2-wire Serial Interface Data	2
13	GND	Ground	1
14	RX3p	Receiver Non-Inverted Data Output	
15	RX3n	Receiver Inverted Data Output	
16	GND	Ground	1

17	RX1p	Receiver Non-Inverted Data Output	
18	RX1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	RX2n	Receiver Inverted Data Output	
22	RX2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	RX4n	Receiver Inverted Data Output	
25	RX4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrsL	Module Present, internal pulled down to GND	
28	IntL	Interrupt output, should be pulled up on host board	
29	Vcc TX	+3.3V Transmitter Power Supply	
30	Vcc1	+3.3V Power Supply	
31	LPMODE	Low Power Mode	2
32	GND	Ground	
33	TX3p	Transmitter Non-Inverted Data Input	
34	TX3n	Transmitter Inverted Data Input	
35	GND	Ground	
36	TX1p	Transmitter Non-Inverted Data Input	
37	TX1n	Transmitter Inverted Data Input	
38	GND	Ground	1

## Notes:

1. GND is the symbol for signal and supply (power) common for the module. All are common within the module and all module voltages are reference to this potential unless otherwise noted. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector should be pulled up with 4.7~10K ohms on the host board to a voltage between 3.15V and 3.6V.

**Recommended Host Block Schematic**

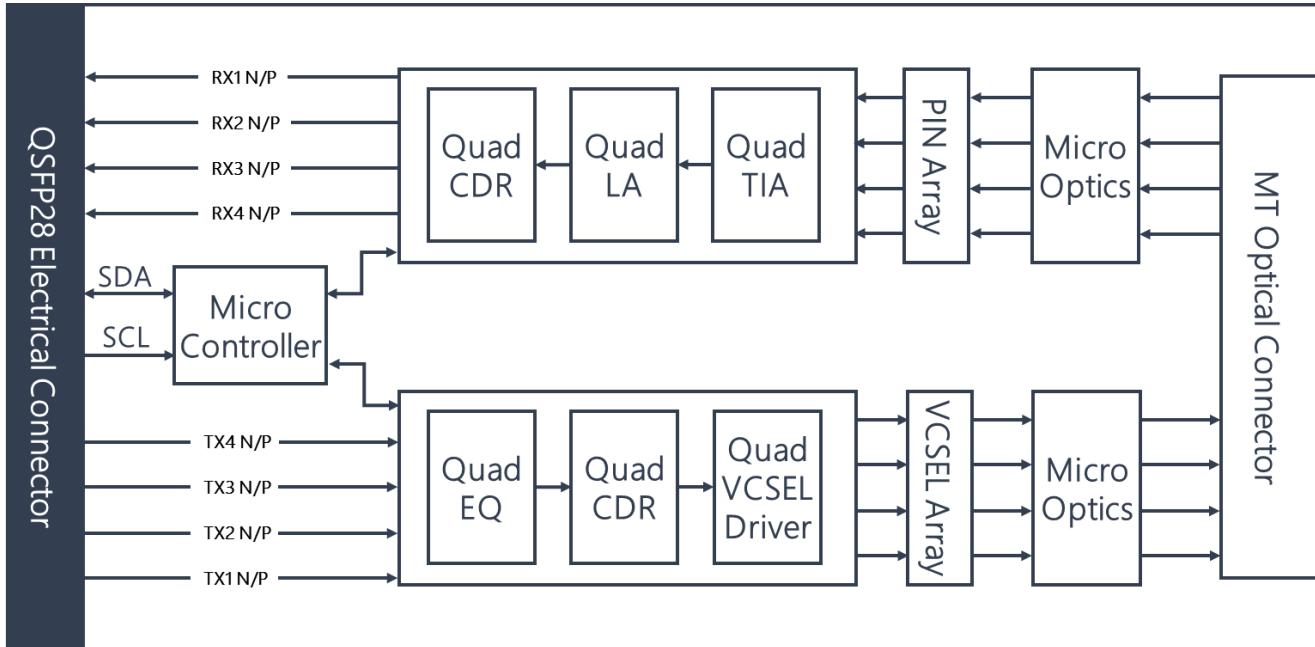

**Regulatory Compliance**

Feature	Test Method	Performance
Laser Eye Safety	FDA 21 CFR 1040.10 and 1040.11 IEC 60825-1: 2007+ A11: 1996+ A2: 2001 IEC 60825-1: 2014	Compliant with Class 1 laser product

**Memory map**


2-Wire Serial Address 1010000x	
Lower Page 00h	
0	Identifier
1-2	Status
3-21	Interrupt Flags
22-23	Free Side Device Monitors
34-81	Channel Monitors
82-85	Reserved
86-98	Control
99	Reserved
100-104	Hardware Interrupt Pin Masks
105-106	Vendor Specific
107	Reserved
108-110	Free Side Device Properties
111-112	Assigned for use by PCI Express
113	Free Side Device Properties
114-118	Reserved
119-122	Password Change Entry Area (Optional)
123-126	Password Entry Area (Optional)
127	Page Select Byte



	Optional	Optional	Optional
Upper Page 00h	Page 01h	Page 02h	Page 03h
128 Identifier	128 CC_APPS	128-255 User EEPROM data	128-175 Free Side Device Thresholds
129-191 Base ID Fields	129 AST Table Length (TL)		176-223 Channel Thresholds
	130-131 Application Code Entry 0		
	132-133 Application Code Entry 1		
	134-253 other entries		224 TX EQ & RX Emphasis Magnitude ID
192-223 Extended ID			225 RX output amplitude indicators
224-255 Vendor Specific ID			226-241 Channel Monitor Masks
	254-255 Application Code Entry TL		252-255 Reserved

### Mechanical Drawing

Product shall be of design, construction and physical dimensions specified on applicable product drawing.

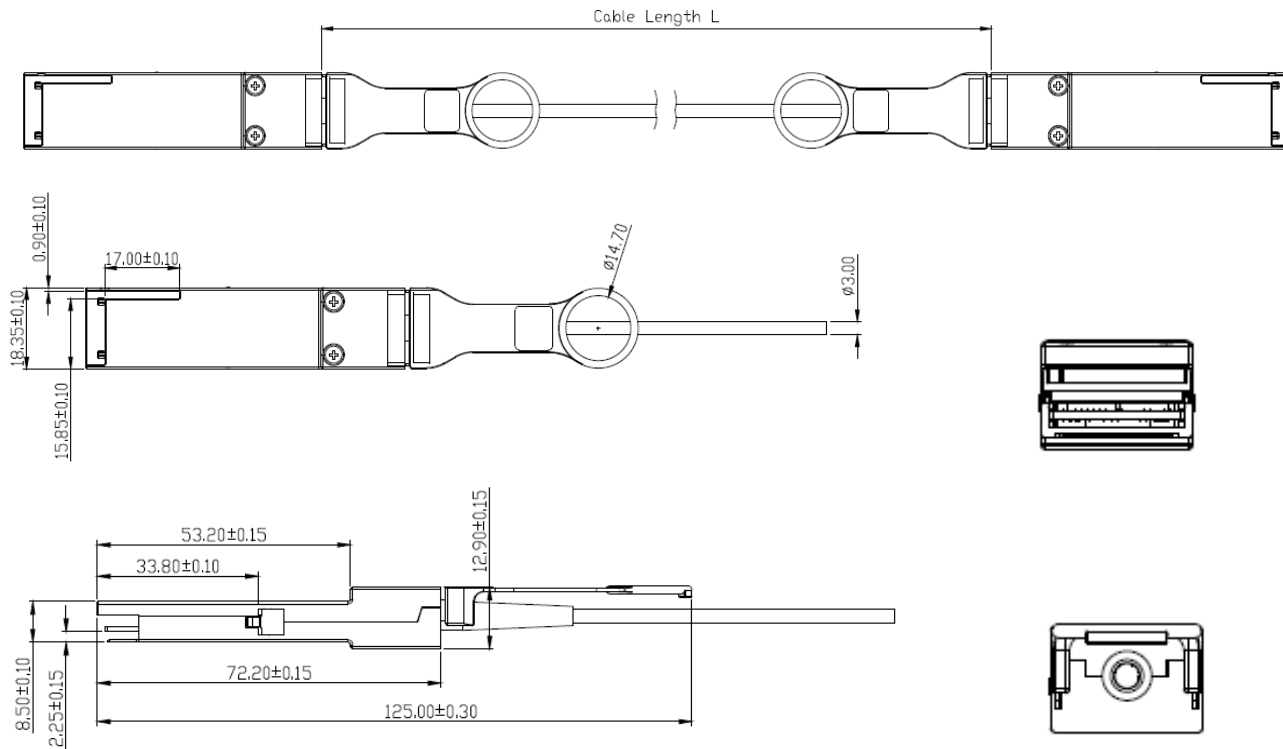

Unit: mm

The force specification for AOC is in the list below:

Parameter	Min.	Max.	Unit.	Comments.
QSFP Module Insertion		40	Newton	
QSFP Module Extraction		30	Newton	
QSFP Module Retention	90		Newton	
Insertion and removal cycles	50		Cycle	
Cable outer Diameter	2.9	3.0	mm	
Cable Jacket Material	LSZH			



**Ordering Information**

Part No	Specification						
	Package	Data rate	Fiber	Cable Type	Cable Length*	Temp.	Application
WS-QS28-AOCLC013	QSFP28	25.78125Gb/s per channel	OM3	Ribbon LSZH	1m	0~70°C	100GBASE-SR4 Ethernet InfiniBand SDR, QDR, DDR
WS-QS28-AOCLC033	QSFP28	25.78125Gb/s per channel	OM3	Ribbon LSZH	3m	0~70°C	100GBASE-SR4 Ethernet InfiniBand SDR, QDR, DDR
WS-QS28-AOCLC053	QSFP28	25.78125Gb/s per channel	OM3	Ribbon LSZH	5m	0~70°C	100GBASE-SR4 Ethernet InfiniBand SDR, QDR, DDR
WS-QS28-AOCLC073	QSFP28	25.78125Gb/s per channel	OM3	Ribbon LSZH	7m	0~70°C	100GBASE-SR4 Ethernet InfiniBand SDR, QDR, DDR
WS-QS28-AOCLC103	QSFP28	25.78125Gb/s per channel	OM3	Ribbon LSZH	10m	0~70°C	100GBASE-SR4 Ethernet InfiniBand SDR, QDR, DDR
WS-QS28-AOCLC153	QSFP28	25.78125Gb/s per channel	OM3	Ribbon LSZH	15m	0~70°C	100GBASE-SR4 Ethernet InfiniBand SDR, QDR, DDR

\* Please check with our sales for more information.

**Modification History**

Revision	Date	Description	Originator	Review	Approved
V1.0	14-Feb-2020	New Issue	Ivy Chen	Wayne Liao	Wayne Liao



**Taipei Headquarters**  
 16F-5, No. 75, Sec. 1,  
 Xintai 5th Rd., Xizhi  
 Dist., New Taipei City  
 22101, Taiwan  
 Tel: +886-2-2698-7208  
 Fax: +886-2-2698-7210

**U.S. Branch**  
 2080 Rancho Higuera Ct.  
 Fremont, CA 94539,  
 USA  
 Tel: 510-651-7800  
 Fax: 510-651-7822

**ShenZhen Branch**  
 610#, 6F, No.204  
 Building, 2nd Industrial  
 zone Nanyou, Nanshan  
 district, Shenzhen,  
 Guangdong China  
 518054  
 Tel: +86-755-86265980